


Invincible II

A range of recessed fluorescent luminaires sealed to IP65/54 (below/above) for maximum protection

- Быстрая и легкая очистка низкопрофильной рамки с 4 мм закаленным безосколочным стеклом
- Уплотнители из пенопласта в корпусе и на раме
- Саморегулирующийся вентиляционный фильтр гарантирует степень защиты IP65 за счет выравнивания давления воздуха
- Подходит для использования в стерильных помещениях категории EN ISO 14644-1, (классы от 1 до 9)



Фотографии, линейные чертежи и фотометрические данные показаны только в качестве образца. Для получения специфической информации пожалуйста выберите индивидуальный продукт.

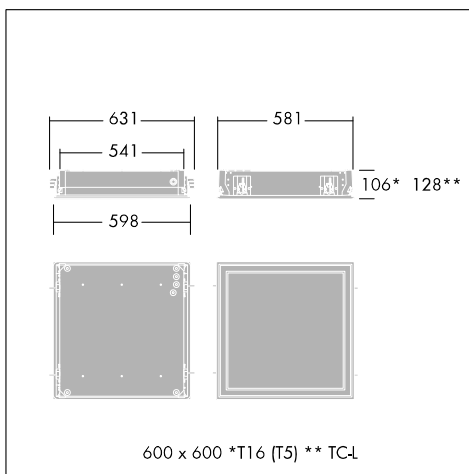

Material/Finish

Housing: white powder coated sheet steel with polycarbonate corner pieces, polyurethane foam gasket around the housing edge.

Optics: double parabolic satinbrite Bivergenz® louvre or clear prismatic PMMA diffuser.

Frame: white painted low profile anodised aluminium frame with 4mm toughened safety glass cover and polyurethane foam gasket.

Монтаж/Обслуживание

Designed for installation into most ceiling system types including exposed and concealed tees (luminaires are not compatible when ceiling tiles join the tee on a side 'off centre' position), The tee must have a maximum width of 24mm and a height range of 20-60mm. In solid ceilings suitable apertures are recommended. Luminaires are not suitable for in use spring tee ceiling grids such as SAS120 / Armstrong Orcal 1800. When installed into SAS 150 / Armstrong Orcal 3000 spring tee ceiling grids the luminaire clamps onto the tee grid above and not flush to the tile. luminaire lamps must run parallel to the spring tees. please consult the ceiling manufacturers technical specification for compatibility. Invincible II has 4x20mm suspension holes in the housing. Suction cups must be ordered separately and you must decide the appropriate quantity required.

Спецификация

To specify state:

Recessed luminaire IP65/54 sealed with clear prismatic or louvre optics. Smooth white low profile anodised aluminium extruded frame with a 4mm toughened safety glass cover. 14/24/28/54W T16 linear fluorescent lamps or 40/55W TC-L compact fluorescent lamps with high frequency control gear. Self regulating breather. Polyurethane foam gaskets on both housing and frame, EN ISO Cleanliness Class 1-9.

As Thorn Invincible II

Invincible II

Инструкция для заказа Lamps and suction cups to be ordered separately.

Описание	Код ILCOS	Патрон	Вт (кг)	Код SAP
Варианты призматических диффузоров				
INVINC2 2x28W T16 HF PR IP65	FDH	G5	9,95	96502904
INVINC2 2x54W T16 HF PR IP65	FDH	G5	9,95	96502905
INVINC2 4x14W T16 HF PR IP65	FDH	G5	13,4	96502907
INVINC2 4x24W T16 HF PR IP65	FDH	G5	13,4	96502909
INVINC2 4x28W T16 HF PR IP65	FDH	G5	18,5	96502911
INVINC2 4x54W T16 HF PR IP65	FDH	G5	18,5	96502913
INVINC2 3x40W TC-L HF PR IP65	FSDH	2G11	10,42	96502914
INVINC2 3x55W TC-L HF PR IP65	FSDH	2G11	10,42	96502915
INVINC2 2x28W T16 HFD PR IP65	FDH	G5	9,95	96502916
INVINC2 2x54W T16 HFD PR IP65	FDH	G5	9,95	96502917
INVINC2 4x14W T16 HFD PR IP65	FDH	G5	13,4	96502919
INVINC2 4x24W T16 HFD PR IP65	FDH	G5	13,4	96502921
INVINC2 4x28W T16 HFD PR IP65	FDH	G5	18,5	96502923
INVINC2 4x54W T16 HFD PR IP65	FDH	G5	18,5	96502925
INVINC2 3x40W TC-L HFD PR IP65	FSDH	2G11	10,42	96502926
INVINC2 3x55W TC-L HFD PR IP65	FSDH	2G11	10,42	96502927
INVINC2 2x28W T16 HF E3 PR IP65	FDH	G5	10,95	96502928
INVINC2 2x54W T16 HF E3 PR IP65	FDH	G5	10,95	96502929
INVINC2 4x14W T16 HF E3 PR IP65	FDH	G5	14,4	96502931
INVINC2 4x28W T16 HF E3 PR IP65	FDH	G5	19,5	96502935
INVINC2 4x54W T16 HF E3 PR IP65	FDH	G5	19,5	96502937
INVINC2 2x 28W T16 HFD E3 PR IP65	FDH	G5	10,95	96502940
INVINC2 2x 54W T16 HFD E3 PR IP65	FDH	G5	10,95	96502941
INVINC2 4x14W T16 HFD E3 PR IP65	FDH	G5	14,4	96502943
INVINC2 4x 28W T16 HFD E3 PR IP65	FDH	G5	19,5	96502947
INVINC2 4x 54W T16 HFD E3 PR IP65	FDH	G5	19,5	96502949
Варианты решеток				
INVINC2 2x28W T16 HF DSB IP65	FDH	G5	9,95	96502856
INVINC2 2x54W T16 HF DSB IP65	FDH	G5	9,95	96502857
INVINC2 4x14W T16 HF DSB IP65	FDH	G5	13,4	96502859
INVINC2 4x24W T16 HF DSB IP65	FDH	G5	13,4	96502861
INVINC2 4x28W T16 HF DSB IP65	FDH	G5	18,5	96502863
INVINC2 4x54W T16 HF DSB IP65	FDH	G5	18,5	96502865
INVINC2 3x40W TC-L HF DSB IP65	FSDH	2G11	10,42	96502866
INVINC2 3x55W TC-L HF DSB IP65	FSDH	2G11	10,42	96502867
INVINC2 2x28W T16 HFD DSB IP65	FDH	G5	9,95	96502868
INVINC2 2x54W T16 HFD DSB IP65	FDH	G5	9,95	96502869
INVINC2 4x14W T16 HFD DSB IP65	FDH	G5	13,4	96502871
INVINC2 4x24W T16 HFD DSB IP65	FDH	G5	13,4	96502873
INVINC2 4x28W T16 HFD DSB IP65	FDH	G5	18,5	96502875
INVINC2 4x54W T16 HFD DSB IP65	FDH	G5	18,5	96502877
INVINC2 3x40W TC-L HFD DSB IP65	FSDH	2G11	10,42	96502878
INVINC2 3x55W TC-L HFD DSB IP65	FSDH	2G11	10,42	96502879
INVINC2 2x28W T16 HF E3 DSB IP65	FDH	G5	10,95	96502880

Invincible II

Описание	Код ILCOS	Патрон	Вт (кг)	Код SAP
INVINC2 2x54W T16 HF E3 DSB IP65	FDH	G5	10,95	96502881
INVINC2 4x14W T16 HF E3 DSB IP65	FDH	G5	13,4	96502883
INVINC2 4x28W T16 HF E3 DSB IP65	FDH	G5	19,5	96502887
INVINC2 4x54W T16 HF E3 DSB IP65	FDH	G5	19,5	96502889
INVINC2 2x28W T16 HFD E3 DSB IP65	FDH	G5	10,95	96502892
INVINC2 2x54W T16 HFD E3 DSB IP65	FDH	G5	10,95	96502893
INVINC2 4x14W T16 HFD E3 DSB IP65	FDH	G5	14,4	96502895
INVINC2 4x28W T16 HFD E3 DSB IP65	FDH	G5	19,5	96502899
INVINC2 4x54W T16 HFD E3 DSB IP65	FDH	G5	19,5	96502901
Аксессуары				
SUCTION CUP			0,095	20935455